

# CLAWSON Tank

Serving the petroleum industry since 1946.




## ACT-100 Underground Storage Tank:

Clawson Tank's ACT-100 Underground Storage Tank is a composite tank that gives you the high structural strength and complete product compatibility of steel together with the superior corrosion protection of a thick fiberglass laminate exterior. ACT-100 composite tanks do not require corrosion monitoring. Years of successful service have proven that the composite technology prevents corrosion as well as any fiberglass tank while providing the structural strength that only steel can offer. The combination of the fiberglass laminate and dielectric bushings seals off the UL58 steel tank from the corrosive elements in the surrounding soil. The scratch resistant 100 mil thick fiberglass reinforced plastic (FRP) laminate bonded to the outer tank wall protects against corrosion. Anodic wear plates provide internal corrosion resistance. The ACT-100 Underground Storage Tank is available in single or double wall steel construction. ACT-100 double wall tanks include a monitoring column which allows use of any of a number of monitoring methods (by others) and are delivered with a vacuum on the interstice eliminating the need for any pre-installation tightness test. Meeting STI and UL's stringent quality standards, ACT-100 Underground Storage Tank features Clawson Tank's 30-year limited warranty and \$1 million pollution and products liability coverage. ACT-100 is also available in multiple compartments (using double bulkheads to split the compartments). Optional: Piping sump, straps, manway and special linings.

Capacity	Diameter	Long	Weight (lbs.)	Capacity	Diameter	Long	Weight (lbs.)
300 gallon	38"	60"	400	6,000 gallon	96"	16'	7,090
550 gallon	48"	72"	840	8,000 gallon	96"	21'4"	7,705
1,000 gallon	48"	128"	1,200	10,000 gallon	96"	27'	8,970
1,000 gallon	64"	72"	1,120	10,000 gallon	10'6"	15'6"	8,200
1,500 gallon	64"	108"	1,910	12,000 gallon	96"	32'	11,200
2,000 gallon	64"	12'	2,255	12,000 gallon	10'6"	18'6"	9,330
3,000 gallon	64"	18'	3,080	15,000 gallon	96"	40'	15,620
4,000 gallon	64"	24'	3,900	15,000 gallon	10'6"	23'4"	13,800
4,000 gallon	96"	10'8"	4,690	20,000 gallon	10'6"	31'	17,120
5,000 gallon	96"	13'4"	5,490	25,000 gallon	10'6"	38'9"	24,720
6,000 gallon	72"	28'5"	6,090	30,000 gallon	10'6"	46'6"	29,230

ACT-100 Tanks: Include five 5" NPT fittings with five 5" x 4" nylon reducer bushings on 3,000 gallon size and up. Optional: Sump Kit, Special lining, 24" manway, Full slab straps, Deadman straps or Safe UST Strap Installation System.

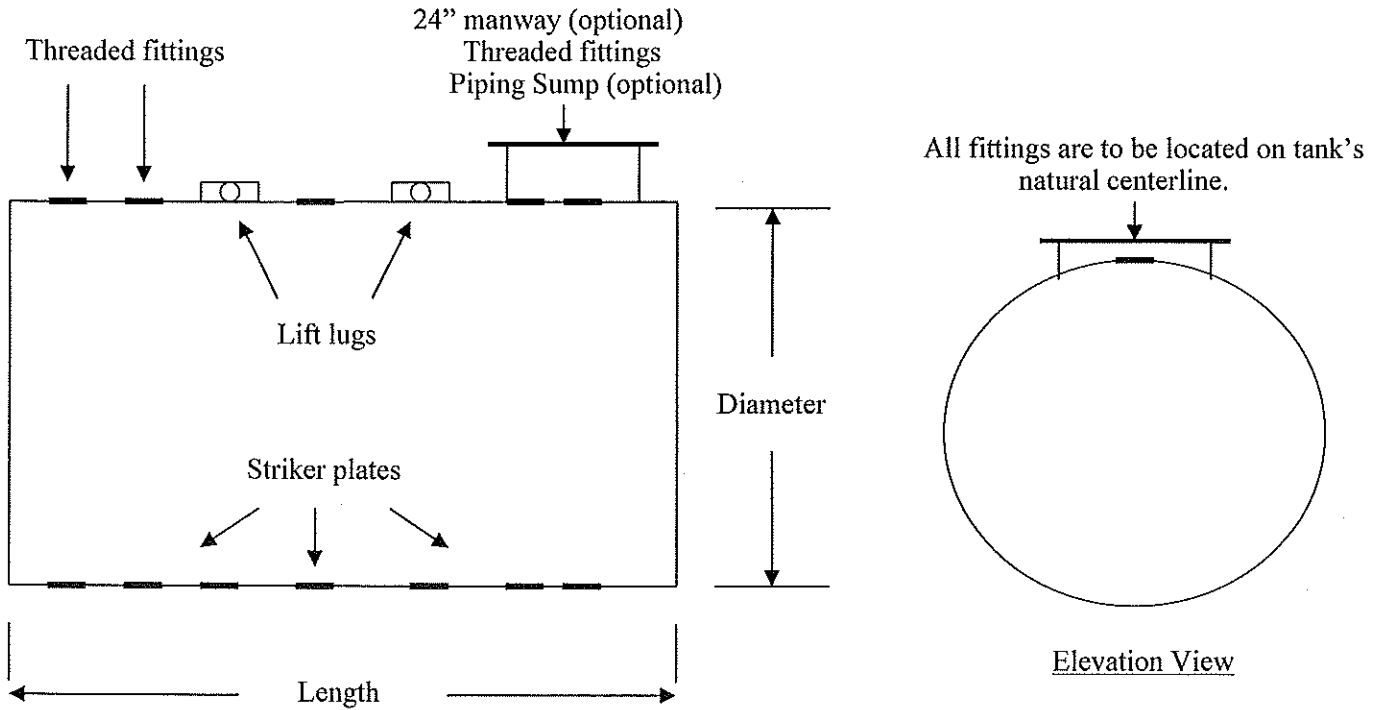

**Recommended Guideline Specifications:**

Furnish and install a \_\_\_\_\_ gallon UL58 single (or double) wall ACT-100 Underground Storage Tank, \_\_\_\_\_ diameter x \_\_\_\_\_ long. Tank shall conform to and be labeled in accordance with Underwriters Laboratories Standard UL58 for single (or double) wall underground tanks.

Tank shall include four 4" threaded fittings, one 5" fitting with 5" x 4" reducer bushing, one 24" manway (optional), \_\_\_\_\_ straps (optional) and one Piping Sump (optional).

Double wall ACT-100 underground tanks are equipped with a monitoring column for the interstitial space.

**Clawson Tank Company**  
**4545 Clawson Tank Drive**  
**Clarkston, MI 48346**  
**1-800-272-1367**