


# CLAWSON Tank

Serving the petroleum industry since 1946.

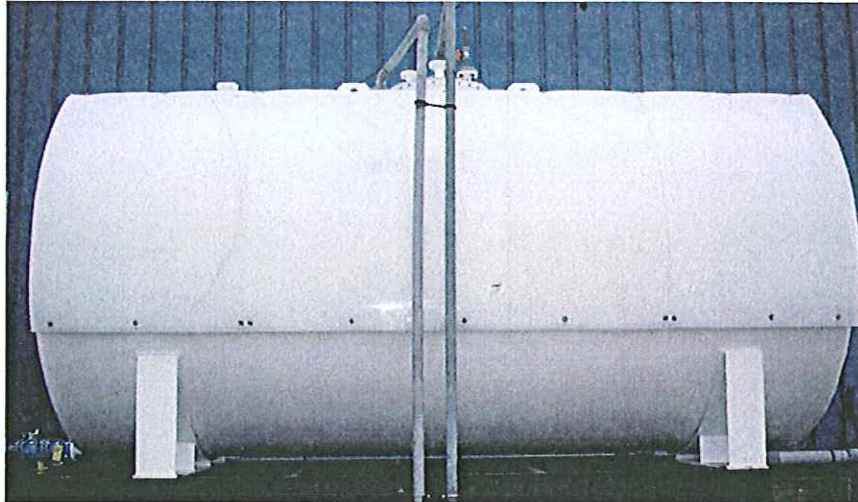


## Horizontal Storage Tank:

Clawson Tank's Horizontal Storage Tanks provide safe storage and a wide variety of sizes to meet your needs. Available in single and double wall carbon steel construction (stainless steel construction available upon request). Tank joints are of lap weld construction with ½" overlap. Flat-flanged heads are standard, as are continuous exterior fillet welds on all joints and a 5-psi factory air test and seam inspection. Each tank will bear the Underwriters Laboratories UL142 label. Because piping installations vary with each tank, size and location of fittings are to be specified by the customer. Special interior linings for aviation fuel, potable water and other specific lining needs are available. Exterior shall be painted with a red oxide primer (other finishes are available).

| Capacity     | Diameter | Long  | Weight (lbs.) | Capacity      | Diameter | Long  | Weight (lbs.) |
|--------------|----------|-------|---------------|---------------|----------|-------|---------------|
| 500 gallon   | 48"      | 72"   | 480           | 10,000 gallon | 96"      | 27'   | 8,000         |
| 1,000 gallon | 64"      | 72"   | 915           | 10,000 gallon | 10'6"    | 15'6" | 7,770         |
| 1,500 gallon | 64"      | 108"  | 1,600         | 12,000 gallon | 96"      | 32'   | 9,800         |
| 2,000 gallon | 64"      | 12'   | 1,980         | 12,000 gallon | 10'6"    | 18'6" | 8,800         |
| 3,000 gallon | 64"      | 18'   | 2,740         | 15,000 gallon | 10'6"    | 23'4" | 11,260        |
| 4,000 gallon | 84"      | 14'   | 3,215         | 20,000 gallon | 10'6"    | 31'   | 13,060        |
| 5,000 gallon | 96"      | 13'4" | 5,010         | 30,000 gallon | 12'      | 36'   | 18,980        |
| 6,000 gallon | 96"      | 16'   | 5,755         | 40,000 gallon | 12'      | 48'   | 32,950        |
| 8,000 gallon | 96"      | 21'4" | 3,500         |               |          |       |               |

Single wall tanks: Are equipped with a 18" roof manway, standard threaded fittings, one normal vent fitting and one emergency vent fitting.

Double wall tanks: Are equipped with a 18" roof manway, standard threaded fittings, one normal vent fitting, two emergency vent fittings and one fitting for the annular space.

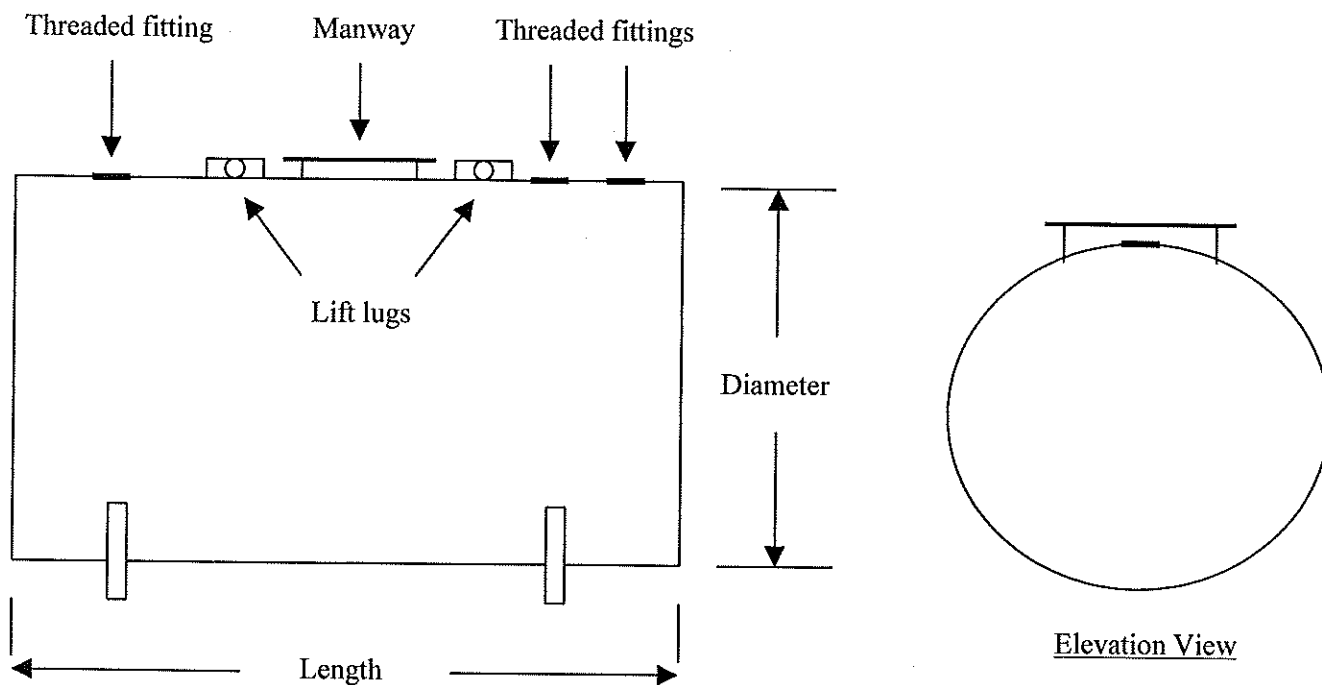


---

**Recommended Guideline Specifications:**

Furnish and install a \_\_\_\_\_ gallon UL142 single wall (or double wall), Horizontal Storage Tank, \_\_\_\_\_ diameter x \_\_\_\_\_ high. Tank shall conform to and be labeled in accordance with Underwriters Laboratories Standard UL142 for single wall (or double wall) tanks.

Tank shall include \_\_\_\_ (#) \_\_\_\_\_" fittings, one 18" manway and one emergency vent fitting for single wall tanks. One 2" annular space fitting and two properly size emergency vent fittings would be included on the double wall tanks.

Tank exterior shall be painted with red oxide primer (Optional at an additional charge: finish coat of enamel, Coal Tar Epoxy and other special paint finishes).

Clawson Tank tanks are air tested at the manufacturing plant but **MUST** be re-tested at the job site by the installer prior to installation.

**Clawson Tank Company  
 4545 Clawson Tank Drive  
 Clarkston, MI 48346  
 1-800-272-1367**